



# Tier 460 Motor SPD

## Contactor Restart 30 Amp

### 400 Series Surge Protective Device

*With Active Monitoring & Control*

#### P5 25kA 30 Amp Terminal Block Contactor



## Features:

### Surge

- Thermally Protected MOV
- Surge Levels Available
- 25 kA/Mode, 50kA/ Phase
- ANSI/UL 1449 4th Edition, CSA
- Sine Wave Tracking: Type 2
- Surge Impulse Rated and Tested
- Blue/Red LED Indication

### Monitoring & Control

- Monitor Under/Over voltage, Phase Loss, Imbalance
- Green Power LED
- Blue Active System LED
- Active Load Disconnect & Reset
- User Selectable Controls:
- +/- 5, 7.5, 10, 15, 20, 25% Over/Under Voltage Trip Settings
- Auto restart available with user selectable reset time. Includes: No delay, 5s, 10s, 30s, 1m, 5m, 10m, No restart

## Why Install Surge Protection with Dedicated Motor Protection?

Transient impulses can significantly impact your facility's power quality, easily disrupting or damaging your process or equipment. While it's important to protect against high-energy events with surge protection, a more frequent, yet often overlooked power quality concern is the damage caused by a phase loss, a temporary voltage sag, or a voltage swell condition. Disconnecting your sensitive loads during these longer duration PQ events, is the easiest way to safeguard important equipment.

*Innovative Solutions for Clean, Reliable Power*



# Tier 460 Motor SPD

## Contactor Restart 30 Amp

### 400 Series Surge Protective Device

*With Active Monitoring & Control*

#### P5 25kA 30 Amp Terminal Block Contactor


### Why Install a Tier 460 Contactor Auto Disconnect and Restart Controller?

The Tier 460 Motor Surge Protection Contactor Restart Device will protect a motor, or an entire system, from power quality events. It runs an onboard surge protection device with a series onboard contactor. The contactor will disconnect the load at predetermined levels, and will reconnect the load at separate predetermined levels automatically. The onboard SPD remains online while the load is disconnected.

This twofold level of protection greatly improves system defenses from power disruption damage.

#### General Technical Specifications

Connection Type	Series
Maximum Continuous Operating Voltage	120V, 150 VAC, 125%; 240V, 320 VAC; 277V, 320 VAC; 480V, 550 VAC; All Others 115%
Short Circuit Current Rating (SCCR)	200kAIC Surge; 22kAIC Contactor
Contactor Current Rating	30 Amp
Protection Modes	All Connected Modes: L-N, L-L, L-G, N-G
Operating Frequency Range	47 - 63 Hz
UL 1449 Location Type	Type 1 or Type 2
UL 1449 Nominal Discharge Current (In)	20 kA
Connection	Terminal Block
Status Indication	Blue/Red LEDs, Form C, Audible Alarm w/ disable switch, Green Power LED
Monitoring	Under Voltage/ Overvoltage + Blue Activation LED, Phase loss, Phase Imbalance
Enclosure	NEMA 4X Rated (Polycarbonate)
50 Ohm EMI/RFI Attenuation	60 /40dB Max
Response Time	<0.5 nanoseconds
Operating Temperature	-40°C to +75°C
Operating Humidity	0% to 95% non-condensing
25 kA/Mode Case Size	8.965" x 10.00" x 4.000", 6.4 lbs
25 kA/Mode Mount Footprint	8.965" x 11.25" x 4.000", 6.4 lbs
Selectable Over/Under Voltage Trigger Levels	+/- 5%, 7.5%, 10%, 15%, 20%, 25%
Contactor Options for Auto Reset	Selectable resets: No Delay, 5s, 10s, 30s, 1m, 5m, 10 m, No Restart
Warranty	SPD: 10 years

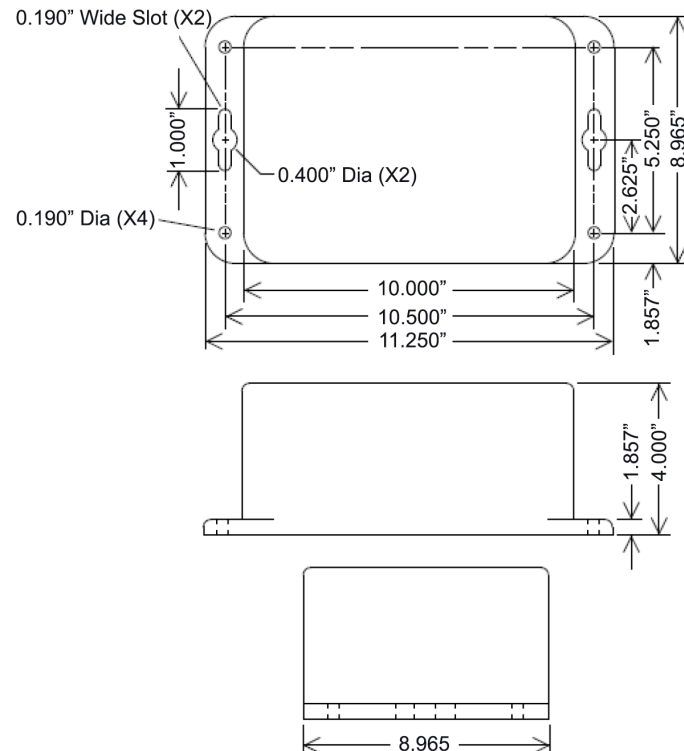

**The 460 P5 25kA Terminal Block Receptacle with 30 Amp Contactor** is our smallest motor surge protection unit, and houses any voltage and phase configuration of our P2 SPDs. When size is a factor, and you don't need a higher surge capacity or contactor current rating, this is the ideal selection for a surge and motor protection package.

**Contactor: 30A (120V supply)**  
**Connection: Terminal Block**  
**Surge Capacity: 25kA/Mode, 50kA/Phase**



# Tier 460 Motor SPD

## Contactor Restart 30 Amp

### 400 Series Surge Protective Device

*With Active Monitoring & Control*

### P5 25kA 30 Amp Terminal Block Contactor

**Table A: Voltage & Source Configuration**

Model Code	Voltage	Source Configuration
000(N/S/Y/D)	N/A	N=Single, S=Split, Y= 3 Phs Wye, D=3 Phs Delta
120S	120/240	Split Phase, 3W+G (L1, L2, N G)
120N	120	Single Phase , 2W+G (L1, N, G)
120Y	120/208	Three Phase Wye, 4W+G (L1, L2, L3, N, G)
208N	208	Single Phase, 2W+G (L1, L2, G)
240N	240	Single Phase, 2W+G (L1, L2, G)
240D	240	Three Phase Delta, 3W+G (L1, L2, L3, G)
277Y	277/480	Three Phase Wye, 4W+G (L1, L2, L3, N, G)
480D	480	Three Phase Delta, 4W+G (L1, L2, L3, N, G)

*For Contactor Only Select 000 and one letter for your contactor phase*

**Table C: Enclosure Size**

Model Code	Dimensions	Capacity	Enclosure Material	Contactor Current or Shunt Trip Supply Volt
2	13.50" x 13.00" x 6.375"	25kA	Steel	30 or 60 Amp
5	8.695" x 11.25" x 4.000"	25kA	Polycarbonate	30 Amp; or 24V or 120V or 277V supply voltage
3	16.00" x 16.00" x 8.00"	50kA-150kA	Steel	30 or 60 Amp; or 24V or 120V or 277V supply voltage
5	8.695" x 11.25" x 4.000"	None	Polycarbonate	30 Amp Contactor only

**Table B: Surge Current Capacity**

Model Code	Surge Capacity /Mode	Surge Capacity / Phase
000	N/A	N/A
025	25 kA	50kA
050	50 kA	100 kA
075	75 kA	150 kA
100	100 kA	200 kA
125	125 kA	250 kA
150	150 kA	300 kA

**Table D: Contactor Current or Shunt Trip Supply Voltage**

Model Code	Contactor Current	Supply Voltage
3	30 Amp	120 Volt
6	60 Amp	120 Volt
9	90 Amp	120 Volt
A	None	24 Volt
B	None	120 Volt
C	None	277 Volt
S	Custom	Custom

**Tier460 Motor Protection Series, 460 Family Ordering Information:**

**Example Model Number: T46120Y025ALP52S3**

Positions: 1-3	Positions: 4-7	Positions: 8-10	Position: 11	Position: 12	Position: 13	Position: 14	Position: 15	Position: 16	Position: 17
Product Family	Voltage/ Phase Configuration	Surge Capacity	Surge Protected Modes	Connection Type	Enclosure Type	Enclosure Size	UL Type	Options	Contactor Current or Shunt Trip Supply Voltage
T46 = 460 Family	See Table A	See Table B	A = All connected modes N=No Surge	W = Wire Lead L = Terminal Block D = Disconnect R = Line Cord Receptacle	P=NEMA 4X; Polycarbonate M=NEMA 4; Steel	See Table C	1=UL Type 1 2=UL Type 2 N=No Surge	S = Standard /No Options C = Surge Center	See Table D